

High output, self powered (Class D switch mode power supply) direct radiation subwoofer cabinet. Consists of an 18" (4" DUO voice coil) neodymium magnet transducer with DCS (Double Conex Spider) technology. DSP controlled with 1000W amplification, 136db SPL.



Key features

- Class D powered
- Integrated Digital Processing
- Internal temperature control
- Electronic protection
- High quality components
- Online monitoring available
- Bass reflex sub unit

Applications

- Theatres & auditoriums
- Houses of worship
- Small / middle sized clubs
- Front fill / side fill reinforcement
- Smaller live stages / events
- Portable sound reinforcement

General description & specifications

The compact ADP-18S sub bass cabinet is part of the ADP Self powered, DSP integrated Series. It has been designed to offer the utmost sound reinforcement reliability, incorporating the latest acoustical and electrical technology and delivering incredible, dynamic sound.

The ADP-18S is an extremely high power sub bass cabinet providing exceptional low frequency reinforcement for the ADP Full range cabinets. It uses one 18" (4" DUO voice coil) neodymium magnet transducer with nomex cone and suspension in direct radiation bass reflex configuration.

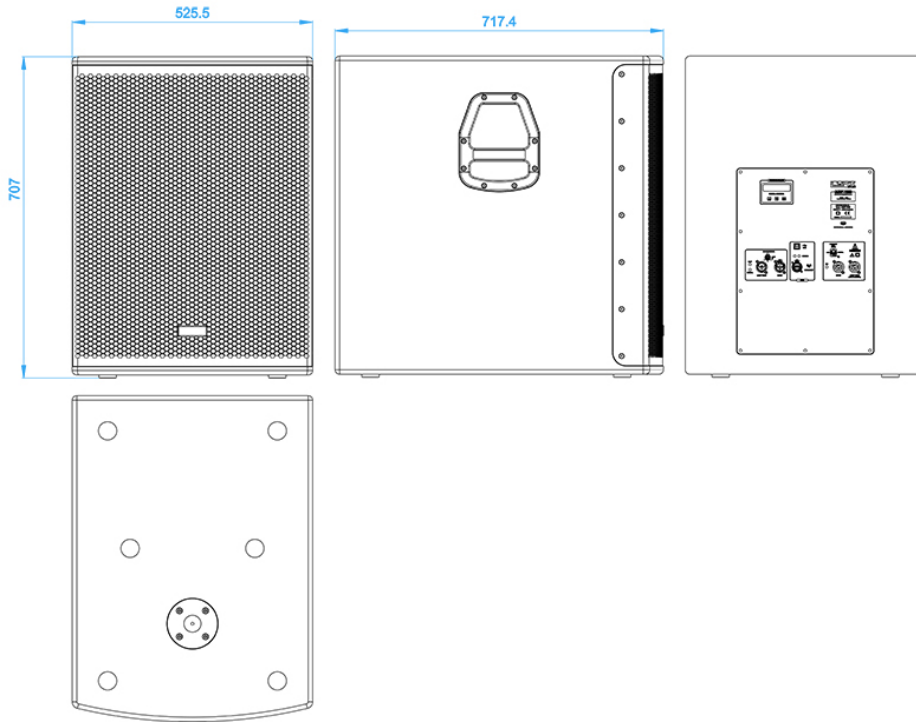
The ADP-18S is powered with a total of 1000W of class D amplification. Each cabinet has a DSP integrated for system protection and optimization. Other features include temperature sensor, fan speed control, Ethernet options and many more.

The ADP-18S has an unbeatable power to size ratio, there is no need for external amplification racks, is very light weight and as such is the ideal solution for portable or fixed sound reinforcement enabling quick and easy set-ups. An integrated pole mount enables easy satellite configuration with the ADP full range cabinets.






Technical Data

Components	1 x 18" Neodymium Woofer with Nomex cone
Frequency range	30 Hz - 250 Hz (-10dB)
Frequency response	35 Hz - 150 Hz (± 3dB)
Max SPL	133 dB / 136 dB peak
Coverage angle	Omnidirectional
Power	1000 W Class D with switching power supply
Configuration	Bass-reflex, Direct radiation
Processing	56 bit Lynx DSPB-22
Cabinet adjustment	back panel LCD
Control connections	XLR / Ethernet (OCS) optional, USB (DSP programming)
AC Power	90 - 264V 50/60 Hz with PFC
AC connections	16A Neutrik powerCon with link output
Finish	Polyurea coating, black colour
Material	18 mm premium birch plywood
Dimensions	707 x 525 x 717 mm (H x W x D)
Weight	51 kg (112 lbs)

Dimensional Drawing



Accessories

	TU-C01	35mm connecting pole for satellite combination between ADP-18S and ADP full range cabinets
	TU-C02	M20 pole support combination between ADP-18S and ADP-15/ ADP-12/ ADP-26. With safety lock
	VSM-V1	35mm speaker mounting top hat for satellite combination between ADP-18S and ADP full range cabinets
	VSM-V2	M20 connector plate for the ADP-18S
	FD-ADP18SNL	Rain cover for ADP-18S

Amplification & DSP

1000w Class D with switching power supply amplifier for the 18" transducer. The amplification far exceeds the transducer needs thus resulting in high output, high damping factor and extremely low levels of distortion.