

Ultra-compact, full range, two way passive cabinet for background sound reinforcement. It consists of a 5" transducer and a 1" high frequency dome tweeter. It offers 90° conic dispersion, 107 dB SPL and 160W program.



Key features

- Ultra-compact light weight
- Background sound reinforcement
- LUKA processor optimised preset
- White, black and RAL colour optional
- Rugged design

Applications

- Club & bar installations
- Live sound
- Theatres
- Houses of worship
- Broadcast
- Public address
- Multi media spaces

General description & specifications

The BS-5 is a two-way versatile, ultracompact light weight, passive cabinet offering high-performance for background sound applications. It features a 5" low/mid transducer with rubber surround and a 1" tweeter with Aluminium dome.


For low-frequency reinforcement we recommend the BS-5 be combined with the SUB-08 or BS-112.

It is made from 9 / 15 mm premium birch plywood and coated polyurea paint.

Technical Data

Components	
• LF	1 x 5" transducer
• HF	1 x 1" dome tweeter
Frequency range	65 Hz - 20 KHz (-10dB)
Frequency response	75 Hz - 18 KHz (± 3dB)
Sensitivity	88 dB (1w @ 1m)
Max SPL	107 dB - 113 dB peak
Coverage angle	90° H x 90° V conic
Rated power RMS	80 W AES, 160 W program, 320 W
Nominal impedance	16 Ω
Connectors	2 X NEUTRIK Speakon NL4 Pin connections: +1 / -1 input +1 / -1 link
Finish	Polyurea coating
Material	9/15 mm premium birch plywood
Fittings	2 x M6 u bracket, 2 x M6 wall bracket
Dimensions	278 x 160 x 170 mm (H x W x D)
Weight	3 Kg (6.6 lbs)

Dimensional Drawing

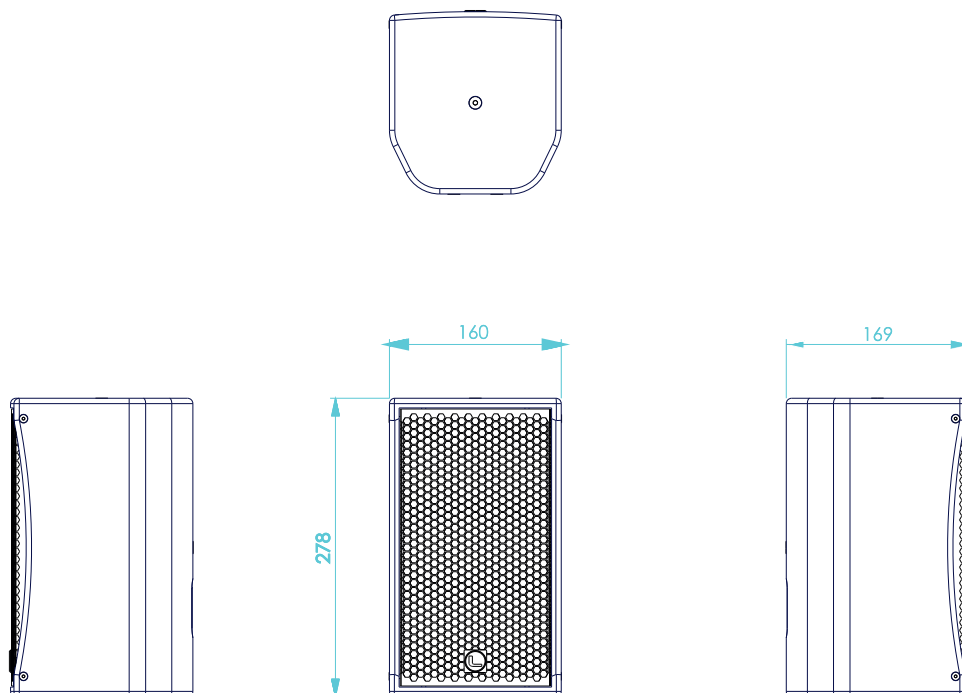

Accessories



WB-010/2

U bracket for BS-5